




Linksys E2500 Router Setup Guide



Configure QoS Settings

1. Log in to the Linksys router.

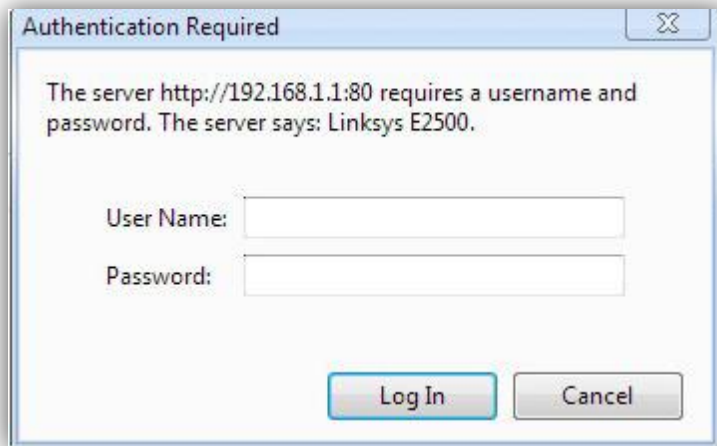

Authentication Required

The server http://192.168.1.1:80 requires a username and password. The server says: Linksys E2500.

User Name:


Password:

Log In Cancel

2. Select Applications & Gaming




3. Select QoS

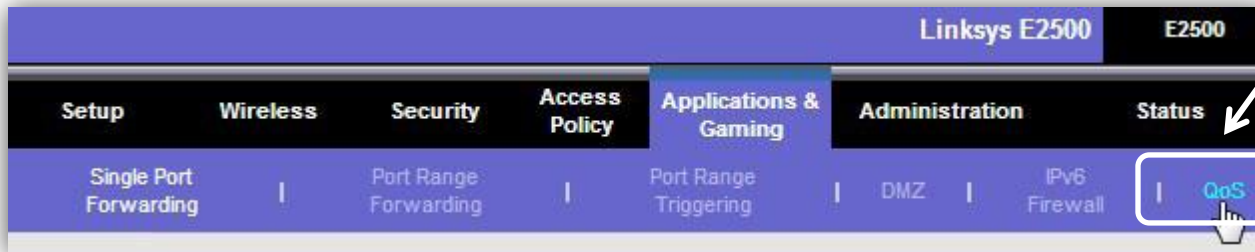

4. Select **Enabled** to enable QoS service. Enter your broadband provider's uplink speed. This information is typically listed on your monthly service invoice. It's 1Mbps in this example.



5. Select **MAC address**. Enter the **Name** of your device and **MAC Address** of each phone. The MAC Address can be found on the back of your device or in the device menu. Set **Priority** to **High**. When finished, click **Apply**.

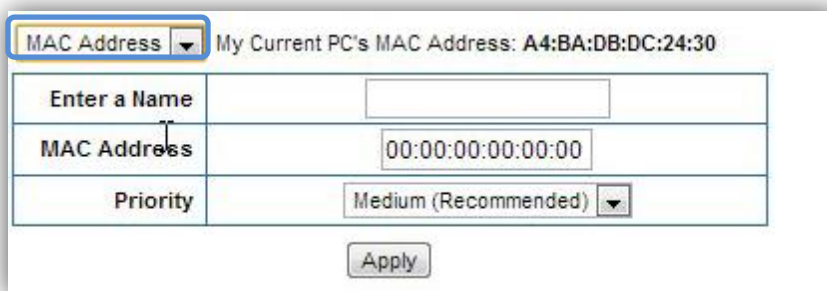

A configuration form with three rows. The first row has a label 'Enter a Name' and a text input field containing 'Telcolab1'. The second row has a label 'MAC Address' and a text input field containing '00:01:02:62:4A:D1'. The third row has a label 'Priority' and a dropdown menu showing 'High (Recommended)'. Below the form is an 'Apply' button. Blue arrows point to the top-right corner of the form, the 'Apply' button, and the 'Priority' dropdown.

Enter a Name	Telcolab1
MAC Address	00:01:02:62:4A:D1
Priority	High (Recommended) ▼

Apply

6. Save settings.

A table with four columns: Priority, Name, Information, and an empty column. The first row contains 'High', 'Telcolab1', 'MAC 00:01:02:62:4A:D1', and two buttons: 'Remove' and 'Edit'. Below the table is a blue bar containing two buttons: 'Save Settings' and 'Cancel Changes'. A blue arrow points to the 'Save Settings' button.

<u>Priority</u>	<u>Name</u>	<u>Information</u>	
High	Telcolab1	MAC 00:01:02:62:4A:D1	Remove Edit

Save Settings Cancel Changes



7. Select Continue to finish and return to the configuration menu.

Your settings have been successfully saved.

Continue